



**FLEXCOURT**  
our court. your game.

# CONCRETE PAD SPECIFICATIONS


- Thickness = 3" up to 1,000 sq. ft. and 4" on larger courts
- Use fiber mesh instead of steel rebar
- 1/2" saw cuts = every 10'
- Slope = 1" over 10'
- Surface Finish = Light - Medium Broom
- Edge Finish = Straight
- Grade soil thoroughly
- Pack 3" of topsoil or sand before pouring
- **Structures Inside the Pad**

If basketball goals are located inside pad, a minimum 3' x 3' x 3' section of concrete is required using four (4) 3/8" x 2' steel rebar evenly spaced vertically in the hole before pouring the cement.

If any court components are located inside the pad, anchors and/or ground sleeves must be placed in the pad prior to pouring cement.

## PRO TIP

When squaring your concrete pad, measure these points to ensure each point is the same length.

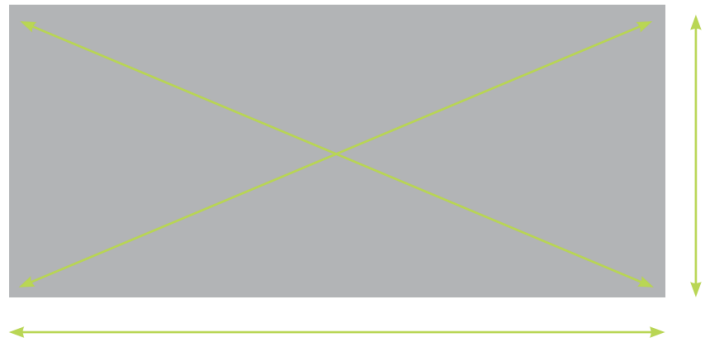

FlexCourt International, Inc.  
5126 Forest Hills Ct.  
Loves Park, IL 61111

[sales@flexcourt.com](mailto:sales@flexcourt.com)

(815) 515-6526

More Information  
[flexcourt.com](http://flexcourt.com)





**FLEXCOURT**  
our court. your game.

# ASPHALT PAD SPECIFICATIONS

- Typical Thickness = 3" (75 mm)
- No extra Seal Coating for Surface Finish
- Slope = 1" (25 mm) over every 10' (3 m)
- Edge Finish Required = Yes
- Structures Outside the Pad

**Sufficient Backfill Material must be prepared to support footings for Court Components**

Minimum 36" (1 m) level ground must exist to support footings for basketball goals, fencing, court lights, sports nets and any other court components to be installed outside the pad. Add a minimum of 12" (25 cm) additional level ground for any special or extended backboard overhangs.

- Structures Inside the Pad

If basketball goals are located inside pad, a minimum 3' x 3' x 3' section of concrete is required using four (4) 3/8" x 2' steel rebar evenly spaced vertically in the hole before pouring the cement.

If any court components are located inside the pad, anchors and/or ground sleeves must be placed in the pad prior to pouring cement.



FlexCourt International, Inc.  
5126 Forest Hills Ct.  
Loves Park, IL 61111

[sales@flexcourt.com](mailto:sales@flexcourt.com)

(815) 515-6526

More Information  
[flexcourt.com](http://flexcourt.com)

